CAP BSM E6 C

CAPRI Tap Range Capri Bath Shower Mixer Eco6 Chrome



_	_	_	₽.			_	_	
F	e	а	ТΙ	u	r	e	S	
	_	9	9	9		_	_	

- Supplied with metal handles
- Supplied with single function rub clean handset, 1.75m hose & wall bracket
- Operates at a minimum pressure of 0.3bar to bath fill
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency (Flow Regulator accurate +/- 10%)

Product Certifications:






For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever handles				
Connection Inlet:	3/4" BSP				
Connection Outlet:	6lpm Flow Limiter				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single Flow				
Isolation Included:	No				

Dimensions (measurements in mm)

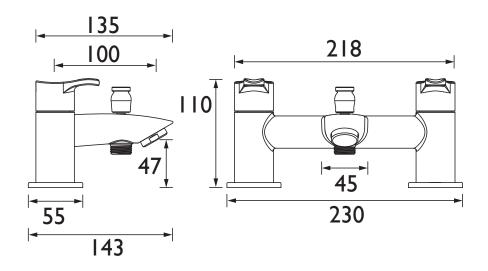

Flow Rates (I/min)										
System Pressure (bar)	0.3	0.5	1	2	3	5				
Through Bath Filler (mixed)	16.7	21.5	30.4	43	52.7	68				
Through Handset (mixed)	6	6	6	6	6	6				

TECHNICAL DATA SHEET



