MPIV2 SHCDIV SS

PIVOT Shower Range Metallix Pivot 2 Concealed Dual Control

Valve and Diverter Silver Sparkle




Features:

- Rear access to service the filters
- Intergral two outlet diverter
- Valve will in 35mm cavity space
- Separate controls for temperature and flow
- Cartridge can be accessed from the front

Specification				
Style:	Contemporary			
Finish/Colour:	Chrome/Silver Sparkle			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Dual Control			
Valve/Cartridge Type:	Recessed			
Maximum Hot Water Supply Temperature °C:	65			
Dynamic Pressure Range: (bar)	5			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All Plumbing Systems			
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar			
Flow Rate: (I/min @ 3 bar)	33			
Connection Inlet:	1/2" BSP			
Connection Outlet:	1/2" BSP			
Isolation Valve Included:	No			
Check Valve Included:	No			

Dimensions (measurements in mm)

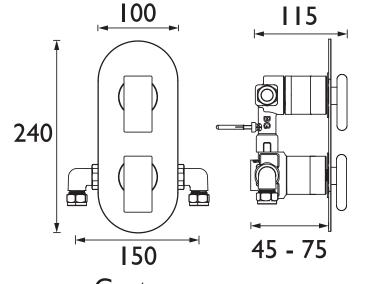

Centres

For more products, visit our website:	Flow Rates (I/min)							
http://www.bristan.com System Pressure (b	System Pressure (bar)	0.2	0.5	1	2	3	5	
■催■	Through Handset (mixed)	8.5	13.44	19	26.87	32.91	42.49	



TECHNICAL DATA SHEET





Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.