

DESCENT SHWR PK

DESCENT Shower Range

Complete Descent Shower Pack



Features:

- This chunky shower pack contains our Descent shower valve with integral twin stopcocks which can feed two outlets simultaneously, a large 250mm slimline metal fixed head shower rose with ceiling fed arm and a stylish adjustable riser shower kit
- Fully serviceable from the front
- Chrome plated to BS EN 248
- Wall outlet designed with Bristan's Wall Mount Technology for easier installation

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	4
Shower Type:	Dual Control
Shower Head Type:	Both
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

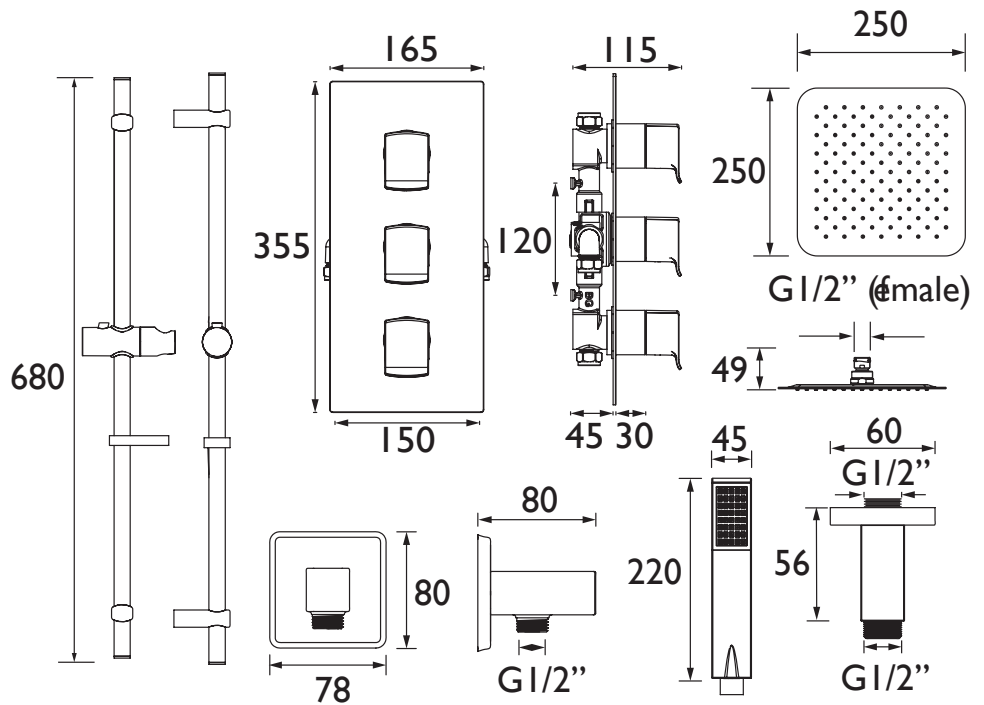

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2	3.2	4.5	6.4	7.8	10.1
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1

TECHNICAL DATA SHEET



BRISTAN